



b€-

1.

- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

2.

[Redacted]



[Redacted]

3.

[Redacted]



4.

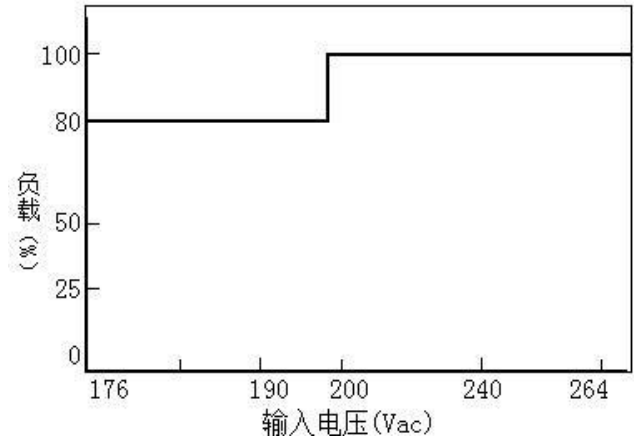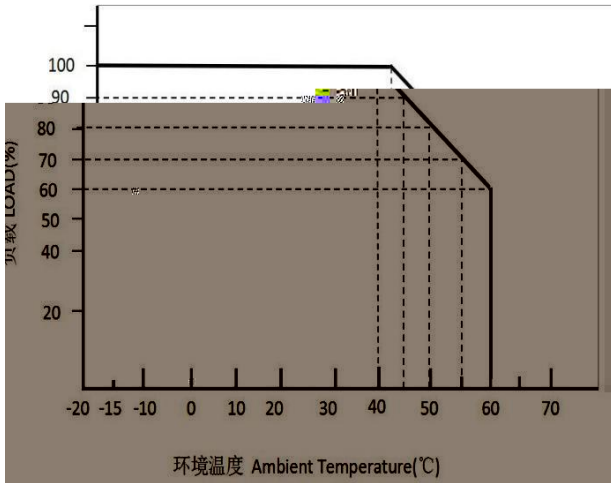

The ambient temperature should be derated after 50 (reduce the load condition). At 60 , the load is 80% of the full load.

5.

Parameter		Specifications
Input characteristics	voltage range	
	Frequency range	
	Power factor	
	Input current	
	Inrush current	
	Leakage current	
Output characteristic	voltage accuracy	
	Ripple current (Ip-Ip)	
	start time	
	Output overshoot	

