

1.

- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★
- ★


[Redacted text block]



2. 产品应用

[Redacted text block]

3.

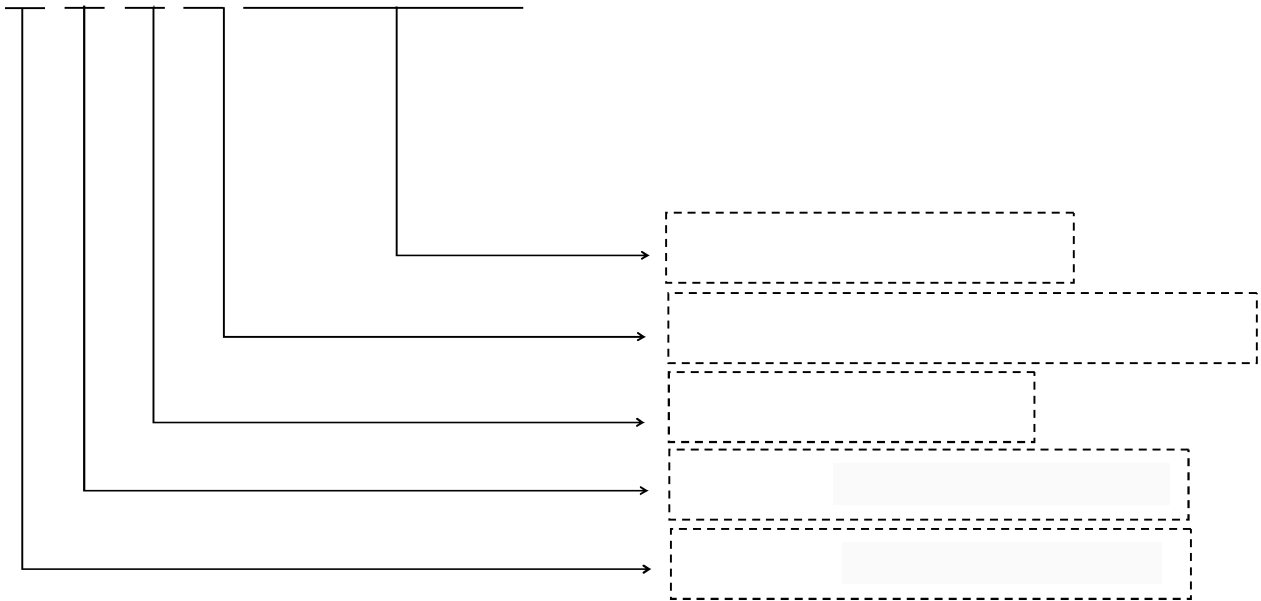

#### 4. 型号列表

Model				* Eff		Size (mm)

The factory set value of output current is the maximum value.

Efficiency was tested at 220Vac input full load.

#### 5. 性能曲线




The ambient temperature should be derated after 50 (reduce the load condition). At 60 , the load is 80% of the full load.

## 6. 电气性能

Parameter	Specifications
	voltage range
	Frequency range
Input characteristics	Input current
	Inrush current
	Leakage current
	voltage accuracy
	Ripple current (Ip-Ip)
Output characteristic	start time
	Output overshoot
	Load adjustment rate
	Linear
Protection function	



## 8. 机构特性

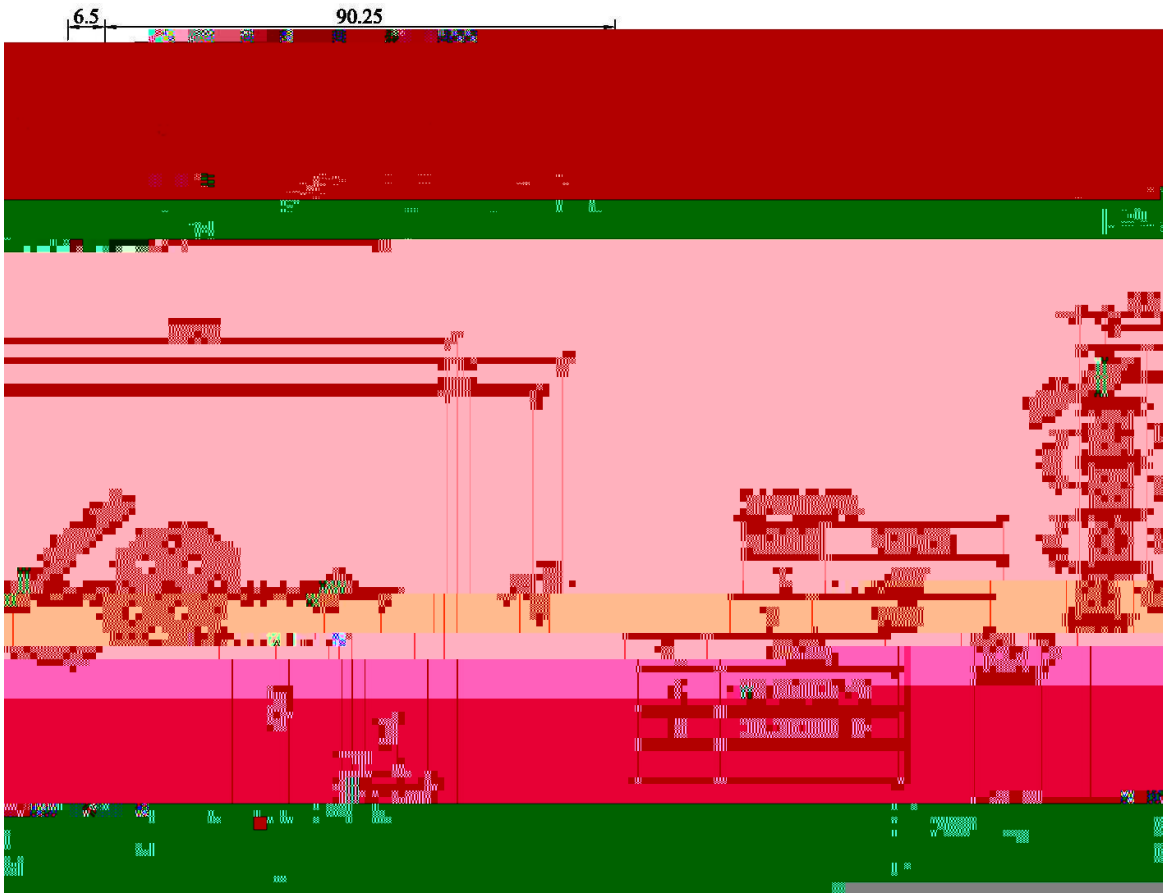

## 9. 版本历史